


Special Features Of Generation 2 Remover

Facing new permit conditions and increased enforcement of selenium regulations, mining operators can rely on Liberty Hydro's Generation 2 Selenium Remover for difficult-to-treat water.

Liberty Hydro's Selenium Remover uses patented zero valent iron (ZVI) technology for enhanced selenium removal. Requiring minimal site work, Remover units can be installed quickly. Designed for cost-effective operation, the unit's long-life media can operate up to two years depending on stream quality.

Generation 2 can be configured in parallel for greater flow capacity or in series for water more difficult to treat. Remover units can operate in cold weather and are especially suited for steep terrain and remote areas. The units can operate using gravity flow or can be equipped with pumps for use on flatter terrain. The standard Remover unit can handle flows of 5 to 20 gallons per minute (gpm), with larger units available up to 100 gpm.

Freedom from Water Problems

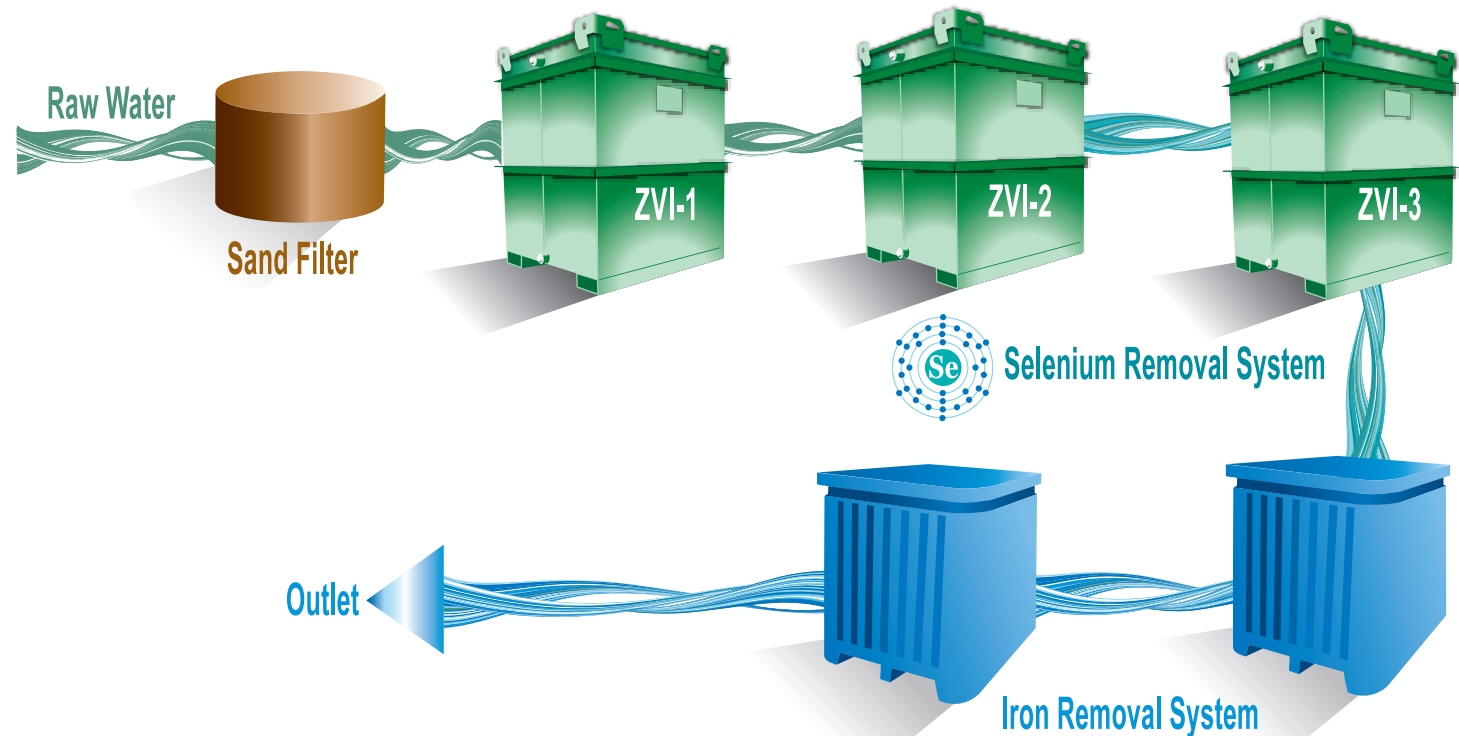

**liberty
hydro™**

888-400-WATR (9287)
info@libertyhydro.com
www.libertyhydro.com